

RE11S

**AC1200智慧漫遊
無線網路訊號延伸器**

安裝指南

5-2018 / V2.0

Edimax Technology Co., Ltd.

No. 278, Xinhu 1st Rd., Neihu Dist., Taipei City, Taiwan

Email: support@edimax.com.tw

Edimax Technology Europe B.V.

Fijenhof 2, 5652 AE Eindhoven, The Netherlands

Email: support@edimax.nl

Edimax Computer Company


3350 Scott Blvd., Bldg.15 Santa Clara, CA 95054, USA

Live Tech Support: 1(800) 652-6776

Email: support@edimax.com

I 產品資訊

1-1 包裝內容

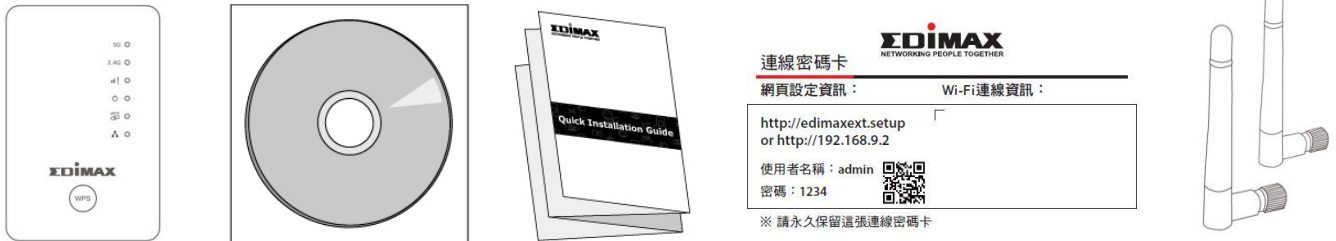

- RE11S x 1
- CD光碟片 (內含安裝指南及使用手冊)
- 快速安裝手冊
- 連線密碼卡
- 雙頻天線 x 2

1-2 系統需求

- 無線訊號延伸/無線橋接模式：需使用現有2.4GHz或5GHz無線網路
- AP模式：需有Cable/ xDSL數據機及分享器或防火牆

配備 802.11 b/g/n/a/ac 無線網卡的電腦及瀏覽器(IE 8 或以上版本、Google Chrome、Firefox 或 最新版 Safari)

智慧型手機 (設定用)： iOS 6 或 Android 4.x 或以上版本

1-3 LED 指示燈



在省電模式下，所有LED燈都會被關閉


LED 名稱	燈號 顏色	LED 狀態	說明
5G	藍燈	恆亮	最佳位置 信號強度 60 - 80%
		慢速閃爍	適當位置 信號強度 40 - 60%或 80-100%
		快速閃爍	較差位置 信號強度 40% 以下
		不亮	無訊號、未連線或在省電模式下
2.4G	藍燈	恆亮	最佳位置 信號強度 60 - 80%
		慢速閃爍	適當位置 信號強度 40 - 60%或 80 - 100%
		快速閃爍	較差位置 信號強度 40% 以下
		不亮	無訊號、未連線或在省電模式下
漫遊模式 指示燈 	綠燈	恆亮	漫遊主控端
		慢速閃爍	漫遊設定同步中
		熄滅	未連線或為漫遊被控端
電源 	綠燈	恆亮	本裝置已啟動
		慢速閃爍	恢復至出廠預設設定或系統正在重新啟動中

		不亮	本裝置已關閉
	綠燈	恆亮	已成功建立 WPS 連線 (此時 LED 燈會持續亮燈約 30 秒後熄滅)
		閃爍	WPS 連線中 (正在等待另一 WPS 設備的連接)
		不亮	未建立 WPS 連接
LAN 有線網路 	綠燈	恆亮	LAN 埠已連接
		不亮	LAN 埠未連接

1-4 訊號強度切換鍵

RE11S本體底部，配備一個無線訊號強度開關，可以讓您在 正常/綠色節能/關閉 三種模式之間做調整切換(如下表中所示)。

“Wi-Fi訊號強度”是指的本產品的無線訊號強度。如果您是在小中型的空間裡使用本產品，您可能不須要使用到100%的Wi-Fi訊號強度。先試試使用綠色節能模式(省電)，看看是否有足夠的Wi-Fi訊號覆蓋。如此，您還可以節省些電呢！

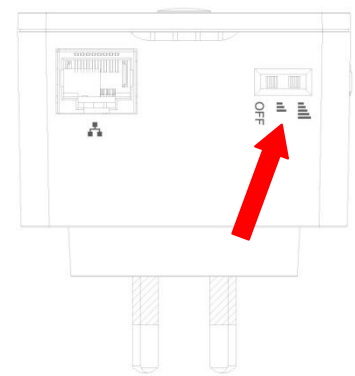

模式	切換方向	Description
正常	右	Wi-Fi 訊號強度：100%
綠色節能	中間	Wi-Fi 訊號強度：50%
關閉	左	關閉無線訊號

II 安裝

RE11S有三種操作模式，您可依您的網路環境需求來選擇。
各操作模式說明如下：


無線訊號 延伸器模式	RE11S可連接至您現有的無線網路並延伸其無線訊號 建議架設RE11S的最佳位置： 大約是在您現有的無線分享器/AP和訊號死角之間的中間區。建議您，訊號延伸器要可以從現有無線分享器/AP接收到至少60%的訊號強度。
無線網卡/ 無線橋接模式	RE11S可透過網路線連接您的有線網路設備(如遊戲機或智慧電視)，做為無線網卡或無線橋接器來使用。 建議架設RE11S的最佳位置： 在無線訊號覆蓋範圍內、接近您有線網路裝置的地方。
無線AP模式	RE11S可透過網路線連接您現有的有線分享器，作為無線AP來使用，讓您的網路設備能透過它無線上網。

您的RE11S出廠預設即為無線延伸器模式，且可以有兩種設定方式，建議您先靠近原有的無線分享器或無線AP進行設定，確認設定完成後再移動到適當位置使用。

一. 透過WPS按鈕設定：

若您的無線分享器/無線AP支援WPS (Wi-Fi Protected Setup)功能，那麼您可以使用此方式來快速設定RE11S。

1. 請按住無線分享器/無線AP上的WPS按鍵約2秒鐘，以啟動WPS功能(若非EDIMAX品牌產品，WPS按鈕的按壓所需時間，請參考其使用手冊。)
2. 接著，請在兩分鐘內，按住RE11S上的WPS按鍵(約兩秒)啟動WPS連線功能。此時RE11S的綠色WPS LED指示燈會呈現閃爍狀態，表示WPS連線功能正在進行中。

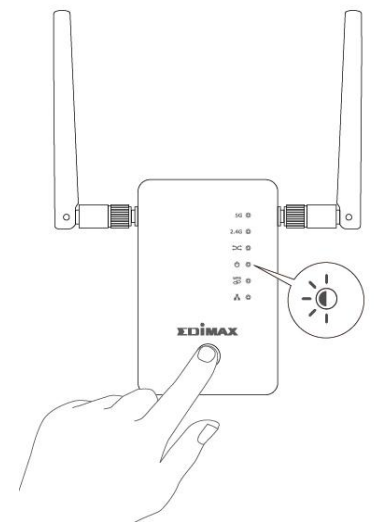


- 當RE11S的**綠色**WPS LED燈號轉為恆亮(恆亮狀態會持續約30秒),即表示WPS連線已成功建立。



不論是 2.4GHz 或 5GHz，您都可以使用 WPS 按鍵來建立無線連線。本產品在 5GHz 訊號範圍內下，會優先以 5GHz 無線連線上層設備。

二. 透過手機/平板或電腦設定：

- 將RE11S插入電源插座。電源指示燈**綠色** (⏻)在開機時會閃爍，待RE11S開機完成，電源燈號(⏻)將會轉為恆亮狀態。

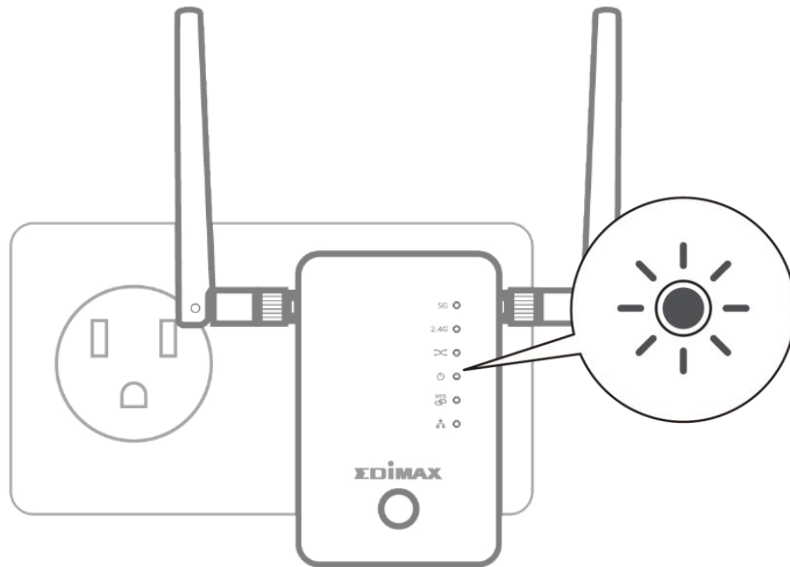

- 請使用您的上網設備(如：筆電、平板或智慧手機)搜尋SSID為**”EdimaxEXT.Setup **”**的Wi-Fi無線訊號，點選並與它連線，再依連線密碼卡或機器底部貼紙上無線安全密鑰輸入(每台RE11S皆不同)，請等待無線連線完成。

註：SSID末兩碼**“**”**會依您的RE11S而不同。



若您使用的是筆電，請先拔除網路線！



連線密碼卡

網頁設定資訊：

Wi-Fi連線資訊：

<http://edimaxext.setup>
or <http://192.168.9.2>

使用者名稱：admin

密碼：1234





出廠無線名稱(SSID)：
edimaxEXT.setup**

出廠無線SSID密碼：

※ 請永久保留這張連線密碼卡


3. 開啟網路瀏覽器(您未被自動導引至”開始”視窗畫面，請在網址列輸入 <http://192.168.9.2>)，點選”開始”啟動安裝步驟。

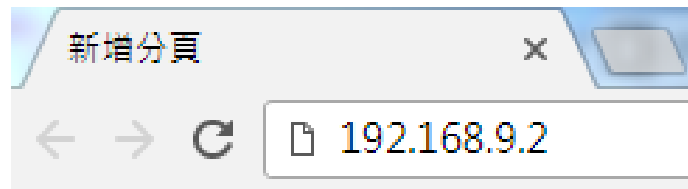

-  若您無法連至 <http://192.168.9.2>，請先確認您的設備是設定為動態IP位址(進一步說明，請參考使用手冊)。

4. 若您希望RE11S做為無線訊號延伸器來使用，請您點選”是的，我需要一個無線訊號延伸器”。若您要選擇其他操作模式，請點選左方選項”切換到不同的模式”。

本產品的出廠預設模式為無線訊號延伸器模式。它連接到現有網路，並延伸其無線訊號範圍

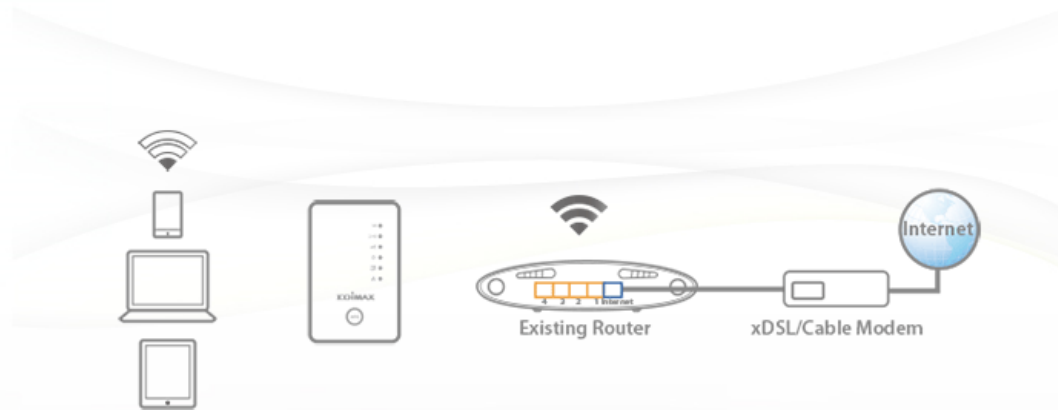

切換到不同的模式

是的，我需要一個無線訊號延伸器

5. 請選擇要使用本產品的2.4G或是5G無線連接現有的無線網路訊號，建議優先使用5G，傳輸效能較佳。

請選擇與現有無線網路相同的無線頻段

- 啟用2.4GHz
- 啟用5GHz

回上一步

下一步

6. RE11S會自動掃描所有的無線訊號，請點選您所要延伸的無線網路。

The screenshot shows the EDIMAX wireless signal extender configuration interface. At the top, it says "5GHz 無線站台掃描" (5GHz Wireless Station Scanning). Below this, there is a paragraph of instructions in Chinese. A checkbox labeled "手動設定無線訊號延伸器" (Manually set wireless signal extender) is present. A table lists detected wireless networks with columns for "選擇" (Select), "SSID", and "訊號" (Signal). The table contains six rows of detected networks. At the bottom, there are three buttons: "回上一步" (Back), "重新整理" (Refresh), and "下一步" (Next).

選擇	SSID	訊號
<input type="radio"/>	OBM-SMB-5G	100%
<input type="radio"/>	IAP1200-B8974E_A	100%
<input type="radio"/>	opentouch-1(5G)	100%
<input type="radio"/>	opentouch-1(5G)	100%
<input type="radio"/>	OBM-SMB-5G	100%
<input type="radio"/>	PSP_NetgearR7000_5G	40%

7. 接著請設定RE11S要延伸出來的2.4G及5G無線名稱，以及上層欲連接的無線設備安全密鑰。

The screenshot shows the EDIMAX wireless signal extender configuration interface for setting SSIDs and security keys. It features a large green checkmark icon. The text indicates that the user has selected to extend the Wi-Fi network (SSID) "OBM-SMB-5G". It provides instructions on assigning different SSIDs to the new Wi-Fi roaming network and setting the security key. Below the instructions, there are input fields for the 2.4GHz and 5GHz wireless signal extender SSIDs, both set to "OBM-SMB-2.4G" and "OBM-SMB-5G" respectively, and a security key field set to "abcd1234". There are also checkboxes for "隱藏SSID" (Hide SSID) for both bands. At the bottom, there are two buttons: "回上一步" (Back) and "下一步" (Next).

接下來請依IQSETUP指示即可完成所有設定。


更多進階設定，可前往 <http://192.168.9.2> 網頁式設定介面中設定(欲了解進一步說明，請參照使用手冊)。


8. 您希望將RE11S設定為無線AP或無線橋接，請依照步驟1~4進入設定畫面後切換到不同模式，然後再依實際需求按IQSETUP畫面指示完成設定。




III 恢復出廠設定

如果您遭遇到本產品的使用問題或者您想要更改本產品的操作模式，您可以將其重置為出廠設定。這個動作會將所有設定都恢復成出廠預設值。

1. 請按壓WPS按鍵(至少10秒鐘)直到電源指示燈綠色LED ()開始閃爍。
2. 請稍待RE11S重新啟動。當電源指示燈轉為恆亮狀態，即表示RE11S已完成恢復出廠值您可重新進行設定。

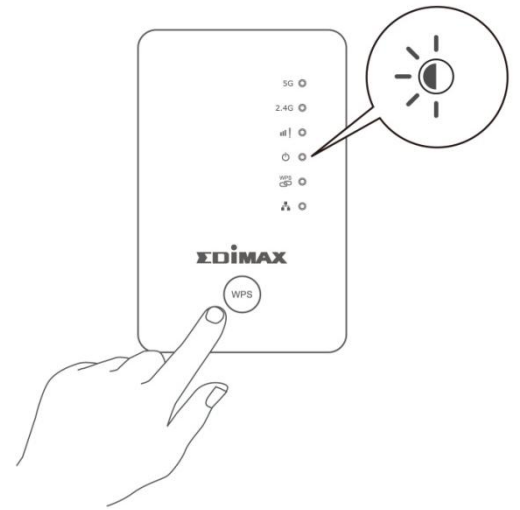

 若您的RE11S已設定完成但又想更換不同工作模式，最快速的作法即是恢復出廠預設值，重新設定即可。



Copyright© by Edimax Technology Co, LTD. all rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of this company.

This company makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties, merchantability or fitness for any particular purpose. Any software described in this manual is sold or licensed "as is". Should the programs prove defective following their purchase, the buyer (and not this company, its distributor, or its dealer) assumes the entire cost of all necessary servicing, repair, and any incidental or consequential damages resulting from any defect in the software. Further, this company reserves the right to revise this publication and to make changes from time to time in the contents hereof without obligation to notify any person of such revision or changes.

The product you have purchased and the setup screen may APPEAR slightly different from those shown in this QIG. For more detailed information about this product, please refer to the User's Manual on the CD-ROM. The software and specifications are subject to change without notice. Please visit our web site www.edimax.com for the update. All right reserved including all brand and product names mentioned in this manual are trademarks and/or registered trademarks of their respective holders.

各地支援 (Local Support)

- 台灣地區
 客服專線：0800-200-115 (限市話撥打·手機請撥打 02-7739-6785)
 服務時間：週一~週五(例假日除外)
 上午 9:00~晚上 8:00
 客服信箱: service@edimax.com.tw
- 中国地区
 客服专线：021-54050636
 客服信箱：service@edimax.com.cn
- Other
 <http://www.edimax.com>

※ 本手冊所提及之其他公司商標及產品名稱為所屬相關公司所有

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio technician for help.

FCC Caution

Any changes or modifications not expressly APPROVED by the party responsible for compliance could void the authority to operate equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible. This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

R&TTE Compliance Statement

This equipment complies with all the requirements of DIRECTIVE 1999/5/EC OF THE EUROPEAN PARLIAMENT AND THE COUNCIL of March 9, 1999 on radio equipment and telecommunication terminal equipment and the mutual recognition of their conformity (R&TTE). The R&TTE Directive repeals and replaces in the directive 98/13/EEC (Telecommunications Terminal Equipment and Satellite Earth Station Equipment) As of April 8, 2000.

Safety

This equipment is designed with the utmost care for the safety of those who install and use it. However, special attention must be paid to the dangers of electric shock and static electricity when working with electrical equipment. All guidelines of this and of the computer manufacture must therefore be allowed at all times to ensure the safe use of the equipment.

EU Countries Intended for Use

The ETSI version of this device is intended for home and office use in Austria, Belgium, Bulgaria, Cyprus, Czech, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Turkey, and United Kingdom. The ETSI version of this device is also authorized for use in EFTA member states: Iceland, Liechtenstein, Norway, and Switzerland.

EU Countries Not Intended for Use

None

EU Declaration of Conformity

- English:** This equipment is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU, 2014/35/EU.
- Français:** Cet équipement est conforme aux exigences essentielles et autres dispositions de la directive 2014/53/EU, 2014/35/EU.
- Čeština:** Toto zařízení je v souladu se základními požadavky a ostatními příslušnými ustanoveními směrnic 2014/53/EU, 2014/35/EU.
- Polski:** Urządzenie jest zgodne z ogólnymi wymaganiami oraz szczególnymi warunkami określonymi Dyrektywą UE 2014/53/EU, 2014/35/EU.
- Română:** Acest echipament este în conformitate cu cerințele esențiale și alte prevederi relevante ale Directivei 2014/53/UE, 2014/35/UE.
- Русский:** Это оборудование соответствует основным требованиям и положениям Директивы 2014/53/EU, 2014/35/EU.
- Magyar:** Ez a berendezés megfelel az alapvető követelményeknek és más vonatkozó irányelveknek (2014/53/EU, 2014/35/EU).
- Türkçe:** Bu cihaz 2014/53/EU, 2014/35/EU direktifleri zorunlu istekler ve diğer hükümlerle ile uyumludur.
- Українська:** Обладнання відповідає вимогам і умовам директиви 2014/53/EU, 2014/35/EU.
- Slovenčina:** Toto zariadenie spĺňa základné požiadavky a ďalšie príslušné ustanovenia smerníc 2014/53/EU, 2014/35/EU.
- Deutsch:** Dieses Gerät erfüllt die Voraussetzungen gemäß den Richtlinien 2014/53/EU, 2014/35/EU.
- Español:** El presente equipo cumple los requisitos esenciales de la Directiva 2014/53/EU, 2014/35/EU.
- Italiano:** Questo APParecchio è conforme ai requisiti essenziali e alle altre disposizioni APPLICabili della Direttiva 2014/53/EU, 2014/35/UE.
- Nederlands:** Dit APParaat voldoet aan de essentiële eisen en andere van toepassing zijnde bepalingen van richtlijn 2014/53/EU, 2014/35/EU.
- Português:** Este equipamento cumpre os requisitos essenciais da Directiva 2014/53/EU, 2014/35/EU.
- Norsk:** Dette utstyret er i samsvar med de viktigste kravene og andre relevante regler i Direktiv 2014/53/EU, 2014/35/EU.
- Svenska:** Denna utrustning är i överensstämmelse med de väsentliga kraven och övriga relevanta bestämmelser i direktiv 2014/53/EU, 2014/35/EU.
- Dansk:** Dette udstyr er i overensstemmelse med de væsentligste krav og andre relevante forordninger i direktiv 2014/53/EU, 2014/35/EU.
- suomen kieli:** Tämä laite täyttää direktiivien 2014/53/EU, 2014/35/EU. oleelliset vaatimukset ja muut asiaankuuluvat määräykset.

FOR USE IN AT BE CY CZ DK EE FI FR DE GR HU
IE IT LV LT LU MT NL PL PT SK SI ES SE
GB IS LI NO CH BG RO RU TR UA



WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the APPLICable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Notice According to GNU General Public License Version 2

This product includes software that is subject to the GNU General Public License version 2. The program is free software and distributed without any warranty of the author. We offer, valid for at least three years, to give you, for a charge no more than the costs of physically performing source distribution, a complete machine-readable copy of the corresponding source code.

Das Produkt beinhaltet Software, die den Bedingungen der GNU/GPL-Version 2 unterliegt. Das Programm ist eine sog. „Free Software“, der Autor stellt das Programm ohne irgendeine Gewährleistungen zur Verfügung. Wir bieten Ihnen für einen Zeitraum von drei Jahren an, eine vollständige maschinenlesbare Kopie des Quelltextes der Programme zur Verfügung zu stellen – zu nicht höheren Kosten als denen, die durch den physikalischen Kopiervorgang anfallen.

GNU GENERAL PUBLIC LICENSE Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc. 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software—to make sure the software is free for all its users. This General Public License APPLies to most of the Free Software Foundation’s software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can APPLy it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author’s protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors’ reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone’s free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License APPLies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The “Program”, below, refers to any such program or work, and a “work based on the Program” means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term “modification”.) Each licensee is addressed as “you”.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and APPropriately publish on each copy an APPropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an APPropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements APPLy to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not APPLy to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to APPLY and the section as a whole is intended to APPLY in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent APPLICATION of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which APPLIES to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

「低功率射頻電機」警告聲明

「經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能」。

「低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾」。

FCC 警告聲明：

本設備已通過測試並符合 FCC 規則第 15 部分有關數位裝置的規定。這些限制的主要目的是在保護商業區中運作此種設備時，提供合理程度的保護，避免有害干擾。本設備會產生、使用並放射射頻能源，若不按指示手冊安裝和使用，會對無線通訊造成有害干擾。在住宅區中運作本設備亦可能造成有害干擾，在這種情況下，使用者會被要求採用以下一種或多種方法來改善干擾的情形：

1. 調整接收天線的方向或移動其位置。
2. 將設備與接收天線的距離增加。
3. 諮詢經銷商或有經驗的無線電/電視技術員的協助。

FCC 聲明：

這個設備遵照FCC 規則第15節，操作程序受限於以下二個條件：

- (1) 這個設備不能導致有害的干擾。
- (2) 這個設備必須可接受任一種干擾，包括可能導致非預期操作的干擾。

FCC輻射暴露聲明：

本設備完全符合美國聯邦通訊委員會針對非控制環境所提出之輻射暴露限制。用戶必須遵照所有滿足射頻暴露符合性之特殊操作說明，在正常操作時並距離該機器20公分以上。本發射器所使用之天線在同一地點不得存在有其他天線或發射器或是與之合併操作。

CE標誌警告：

本機器屬於Class B產品，適用於家用環境中，由於本產品可能會產生無線電干擾，因此用戶需採取適當防範措施。

NCC低功率電波輻射性電機管理辦法

第十二條

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規規定作業之無線電通信。

低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

[警語] 「電磁波曝露量MPE標準值1mW/cm²，送測產品實測值為 0.186 mW/cm²」

「應避免影響附近雷達系統之操作」

「高增益指向性天線只得應用於固定式點對點系統」

安全性

本設備之設計已針對安裝和使用上的安全性施以最大重視。然而，仍需對電擊和靜電的危險給予特別留意。

歐洲地區 EU Countries Intended for Use

本機器的ETSI版本可以使用於下列國家的一般家庭及辦公室內：澳洲、比利時、丹麥、芬蘭、法國、德國、希臘、愛爾蘭、義大利、盧森堡、保加利亞、塞浦路斯、捷克、愛沙尼亞、匈牙利、拉脫維亞、立陶宛、馬爾他、波蘭、羅馬尼亞、斯洛伐克、斯洛伐尼亞、荷蘭、西班牙、葡萄牙、瑞典及英國。並且此ETSI版本也已被下列國家授權准予使用：冰島、列之敦斯敦、挪威、瑞士。請檢查您所使用的通道，歐洲標準限定最大幅射功率為100mW EIRP，範圍為2.4GHz ~ 2.4835GHz。

※ 本手冊所提及之其他公司商標及產品名稱為所屬相關公司所有。

限用物質含有情況標示

設備名稱： Equipment name	AC1200 智慧漫遊 無線網路訊號延伸器	型號： Type designation	RE11S			
單元 Unit	限用物質及其化學符號 Restricted substances and its chemical symbols					
	鉛 Lead (Pb)	汞 Mercury (Hg)	鎘 Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr ⁺⁶)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
電路板	○	○	○	○	○	○
外殼	○	○	○	○	○	○
螺絲	○	○	○	○	○	○
散熱墊	○	○	○	○	○	○
光碟片	○	○	○	○	○	○
<p>備考 1. “超出 0.1 wt %” 及 “超出 0.01 wt %” 係指限用物質之百分比含量超出百分比含量基準值。 Note 1 : “ Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.</p> <p>備考 2. “○” 係指該項限用物質之百分比含量未超出百分比含量基準值。 Note 2 : “ ○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.</p> <p>備考 3. “-” 係指該項限用物質為排除項目。 Note 3 : The “-” indicates that the restricted substance corresponds to the exemption.</p>						



ΣD I MAX
NETWORKING PEOPLE TOGETHER